


ideal
HEATING

MODELS

Logic+ 30kW System

MEASUREMENTS

902 (H) x 425 (W) x 312 (D) mm



RICH IN HERITAGE


Ideal Heating is one of the oldest most reputable boiler brands manufactured in the UK. Ideal founded in 1906, meaning that they have over 100 years of providing the best quality boilers to customers continually working to meet ever-changing domestic heating needs.

**10 YEAR*
WARRANTY**

IDEAL LOGIC+ 30 BOILER EXTERNAL

The Logic+ 30 Condensing System Boiler provides excellent energy saving, with ultra quiet operation.

- Made in the UK
- Custom designed external case
- 1:5 Modulation rate
- Built in Frost Protection
- Large backlit LCD display
- Aluminium Silicon Heat Exchanger
- Light weight and compact design
- Quiet operation
- User friendly control panel



☎ 1300 267 583

📍 Hydronic Heating NSW
866 Bourke St, Waterloo.
NSW 2017

🌐 www.hydrornicsw.com.au
✉ info@hydrornicsw.com.au


IDEAL LOGIC+ 30 BOILER EXTERNAL

Technical Information




General Data		30 System	
Gas Supply - NG / LPG		1.13kPa / 2.75kPa	
Gas Supply Connection		1/2"	
Flow Connection		3/4"	
Return Connection		3/4"	
Flue Terminal Diameter	mm	100	
CO2 Content (± 0.7) NG/LPG	Max. CH	8.9%/10.7%	
	Min. CH	8.7%/10.4%	
Maximum Working Pressure (Sealed Systems)	kPa	250	
Electrical Supply		230 V - 50 Hz	
Power Consumption	W	100	
Min. thermostat cable size		1mm twin active	
Water Content	Litre	1.2	
Height	mm	902	
Width	mm	425	
Depth	mm	312	
Packaged Weight	kg	46.8	
Installation Weight	kg	43.2	
Performance Data		Min	Max
Boiler output - Mean 70°C	kW	6.1	30.3
Boiler output - Mean 40°C	kW	6.4	31.0
Gas Consumption	MJ/h	23.01	119.41
Boiler Efficiency	%	91.1	


CLEARANCES

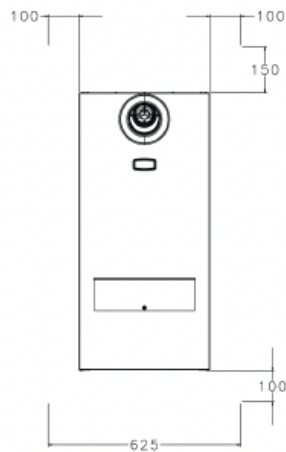


BOILER DIMENSIONS

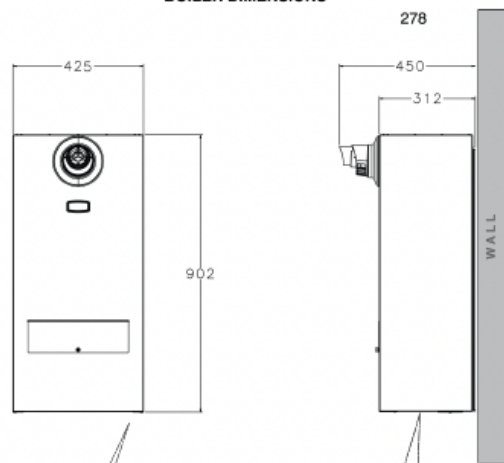

Water Connections and Gas Connection

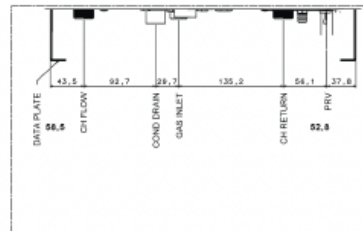

Underside View - Pipe Dimensions to Wall



* Please contact Hydronic Heating NSW for terms & conditions.

